

ALESSIsense

by
 **HANSA**

ALESSI Sense
by HANSA
Installation and maintenance guide






4



5-13



13-15



16-19






20



0773 2201

I (ISO 3822)
 EN 15091
 100 - 1000 kPa
 0.07 l/s (300 kPa w/Controller)
 max. +70°C

IP 44
 Lithium 2CR5 6 V

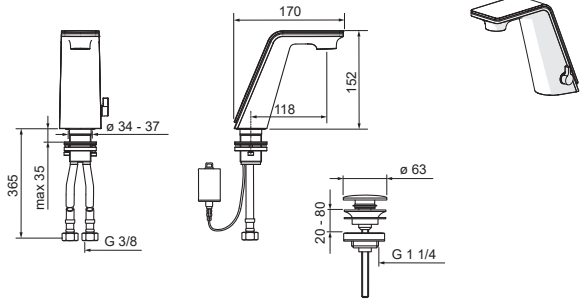




mpi.hansa.com/07732201

CE (EMC 2014/30/EU , 2011/65/EU)

0774 2201



I (ISO 3822)
 EN 15091, EN 1113
 100 - 1000 kPa
 0.07 l/s (300 kPa w/Controller)
 max. +70°C

IP 44
 Lithium 2CR5 6 V,
 AA 1.5 V Lithium x 2, CR 2450 3 V

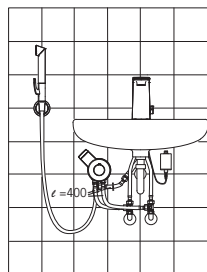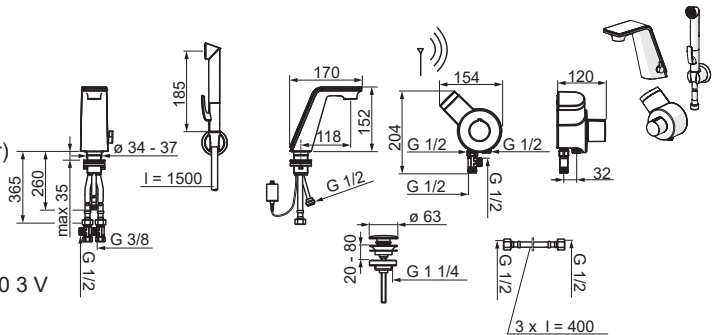


mpi.hansa.com/07742201

CE (EMC 2014/30/EU , 2011/65/EU)

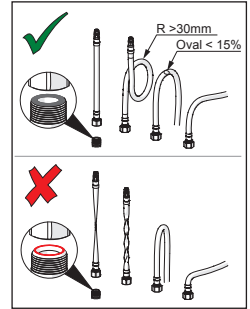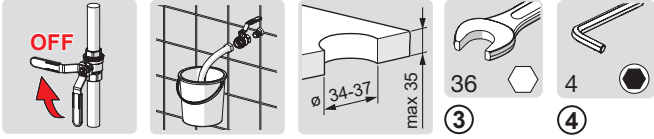


1

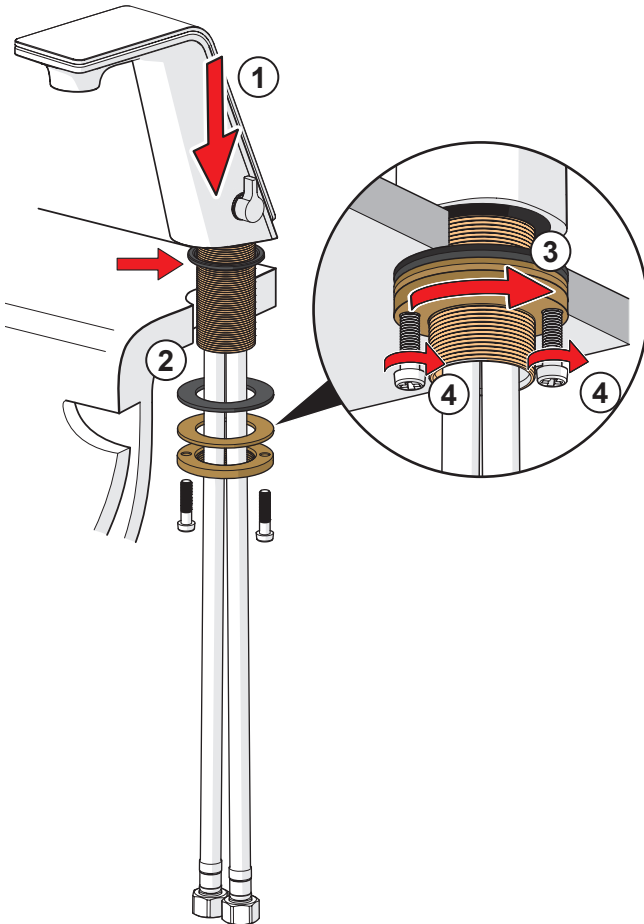






19




① ②

②

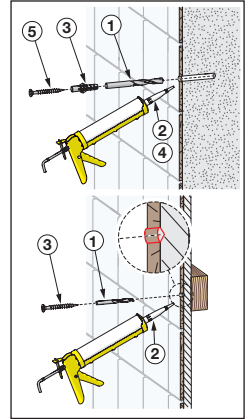
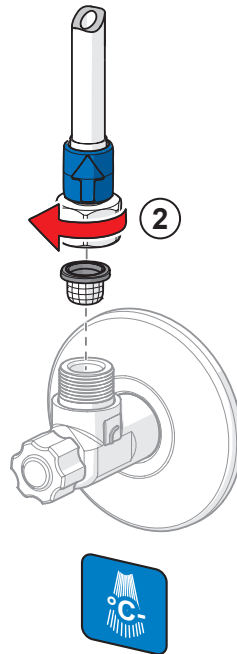
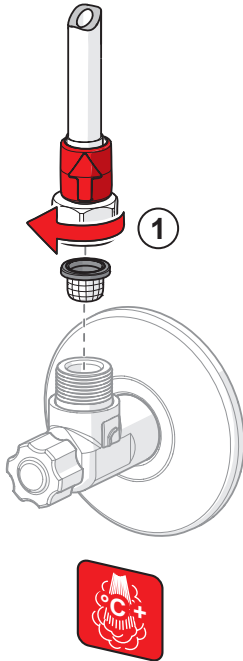




① ... ④




2

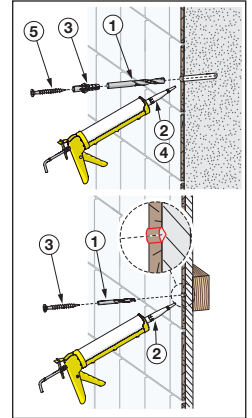
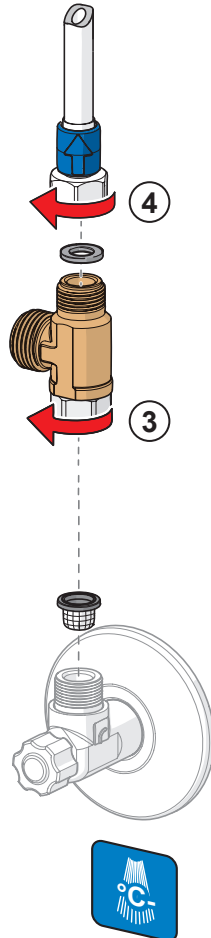
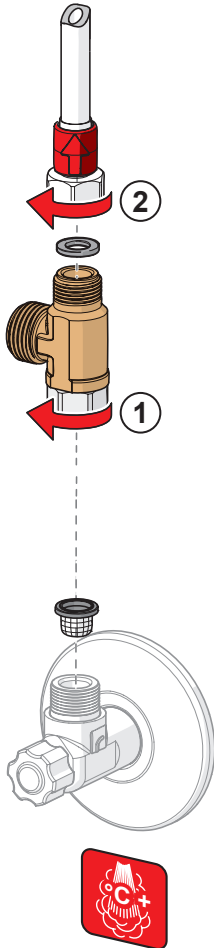




1




3

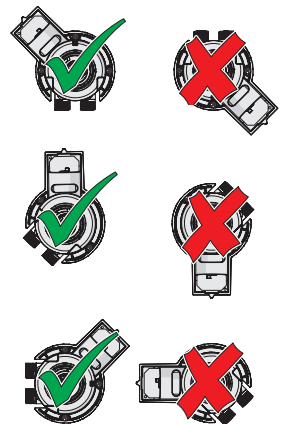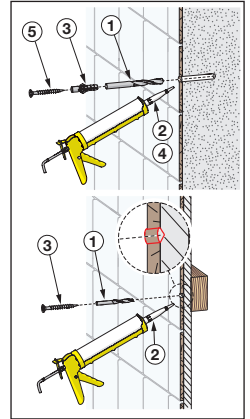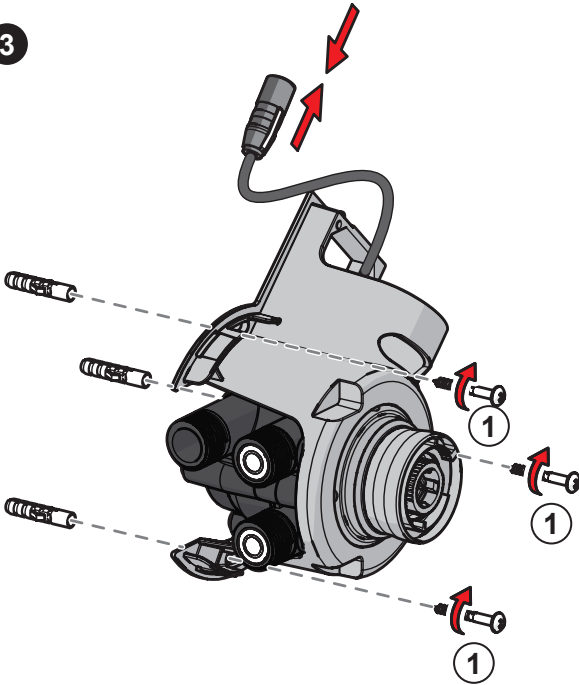




①




② ... ④
⑥ ... ⑨



④ ... ⑥
⑧




4

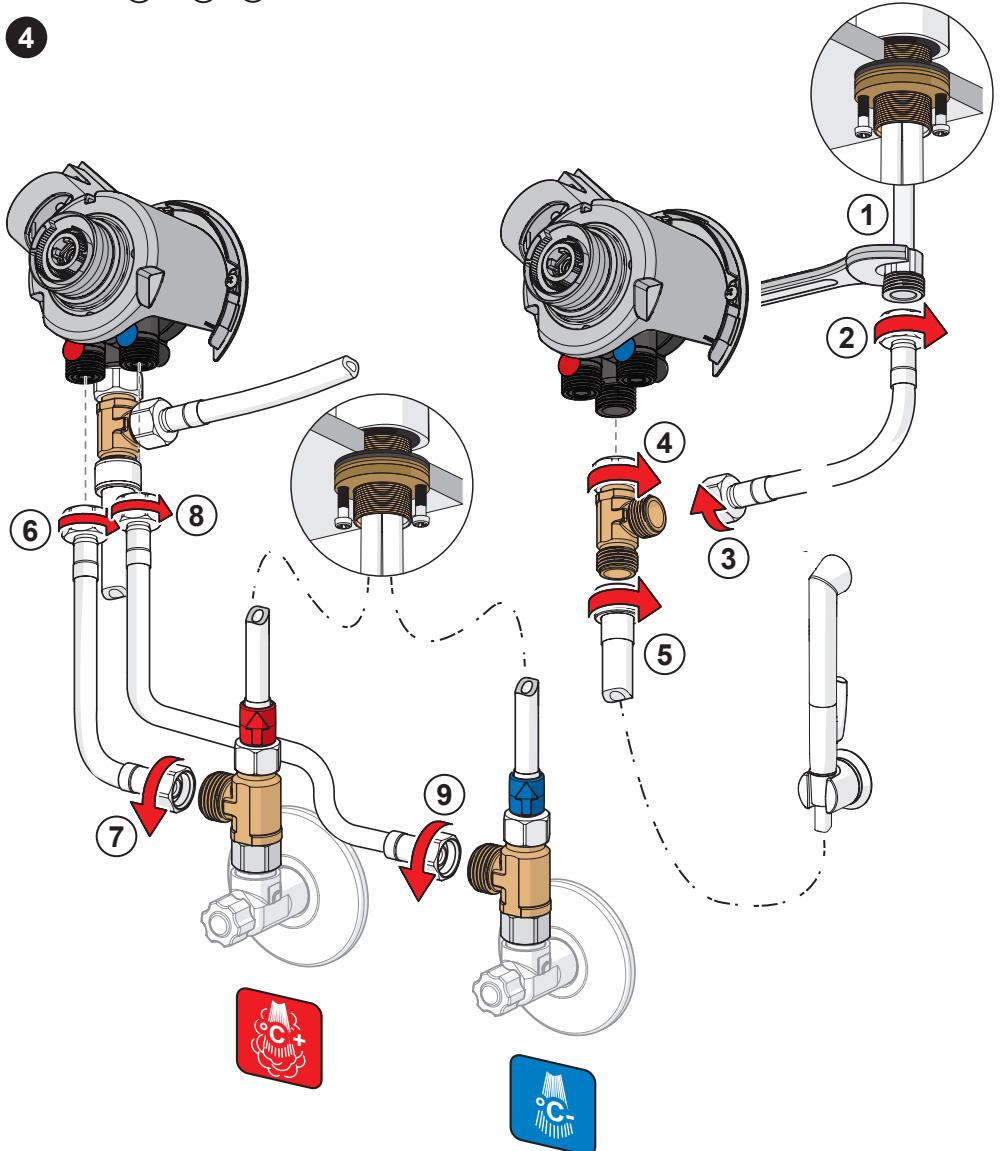





5



AA 1.5V x 2
Lithium

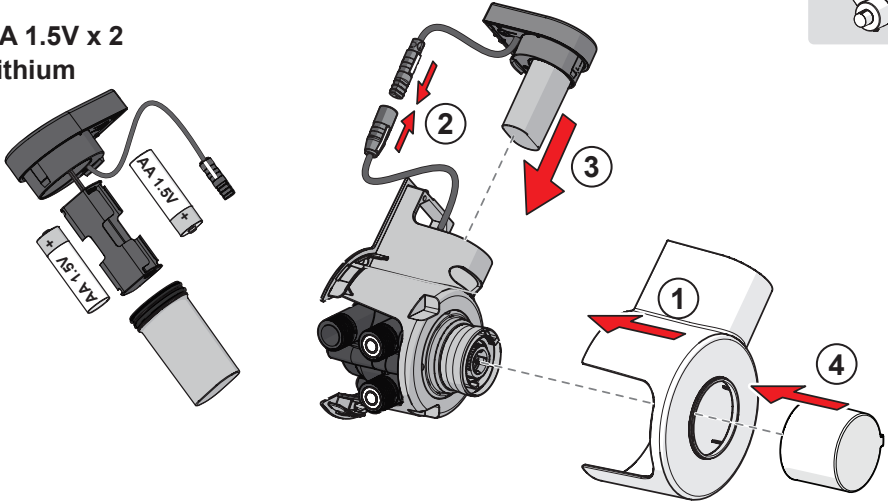


6

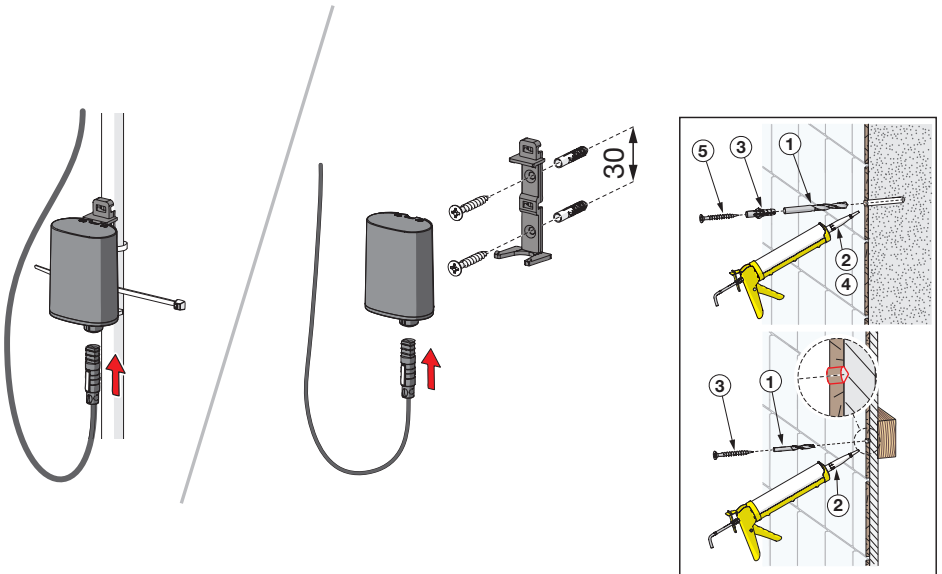











7

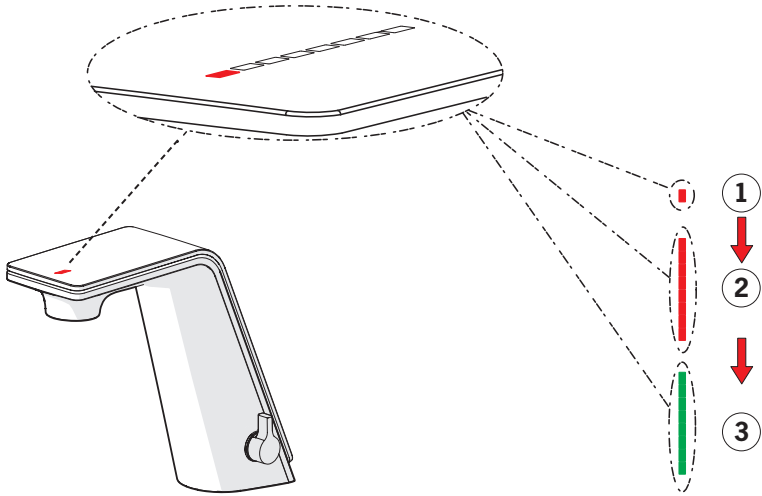

1


8

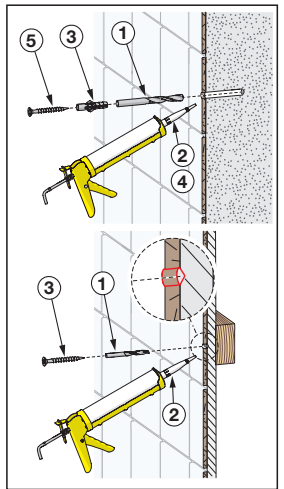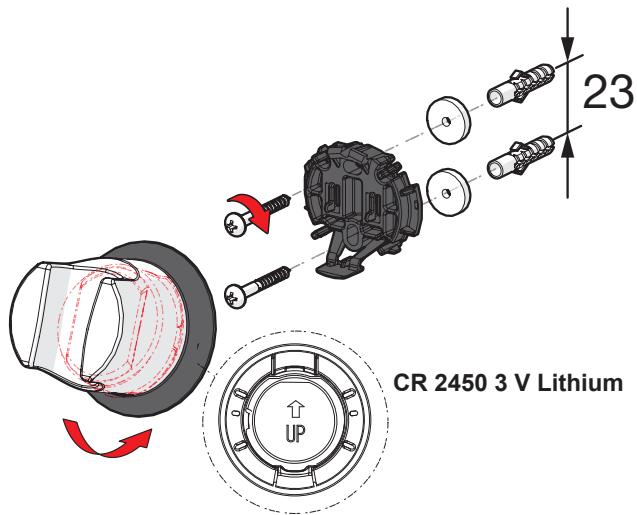

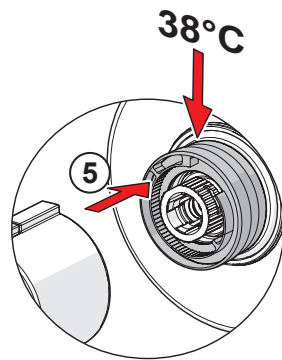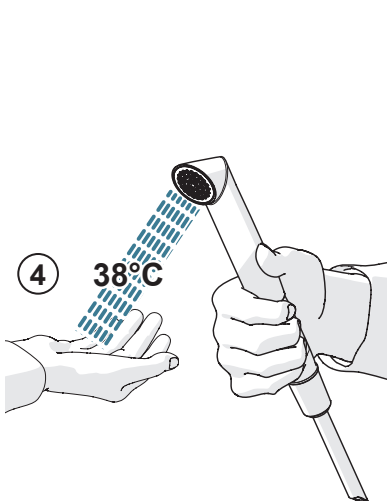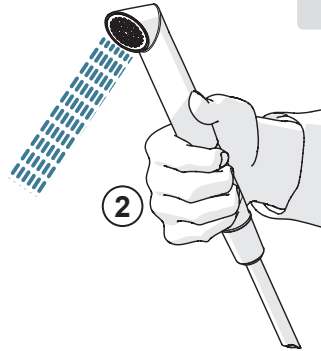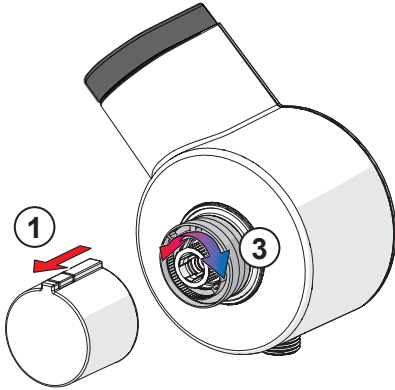





① ③



②

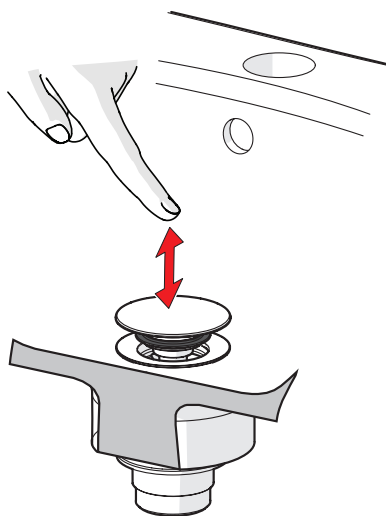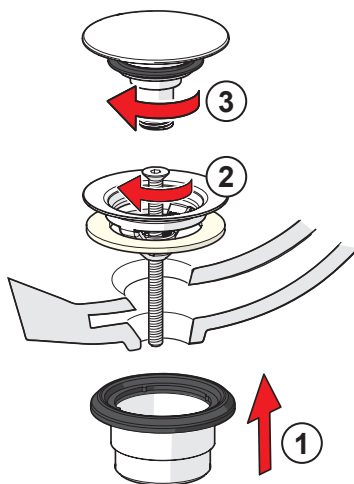



1

ON / OFF

6 s
automatic off

2

~1 s

ON ~1 min

3

ON

max. 2 min
automatic off


OFF




- 1) Short lights OFF
- 2) Short lights ON
- 3) Factory settings






Factory default	1 x	2 x	3 x	4 x	5 x	6 x	7 x	8 x
Max short flow (sec)	1 x	6	8	10	15	20	30	60
Max long flow (sec)	2 x	30	45	90	120	240	300	600
Automatic flush (h)	3 x	0	12	24	48	72	-	-
Automatic flush (sec)	4 x	10	30	60	120	180	240	300
Operation mode	5 x	OFF ¹⁾	ON ²⁾	FS ³⁾	-	-	-	-



Example 1: Max short flow 6 s → 30 s

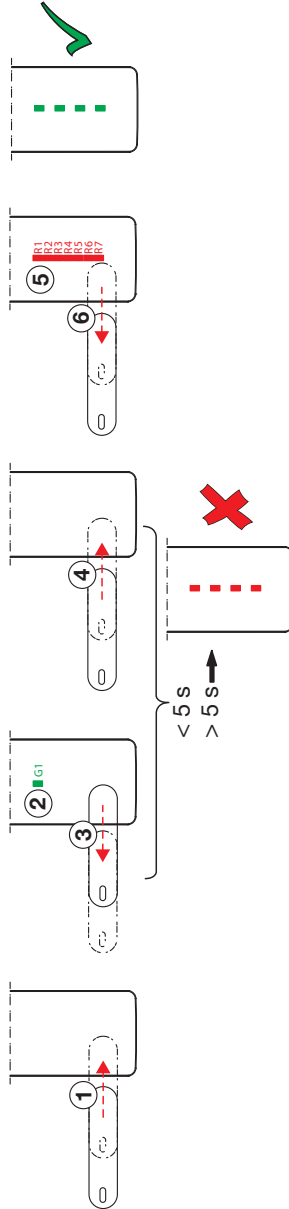

Example 2: Operation mode → FS = factory settings

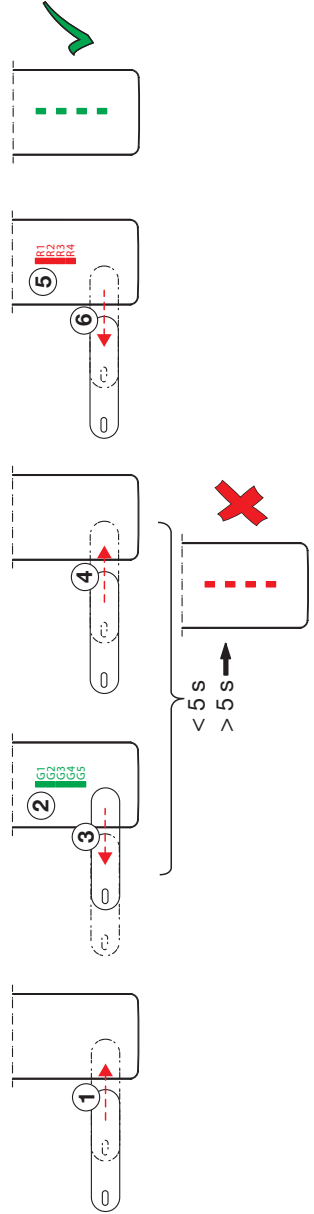


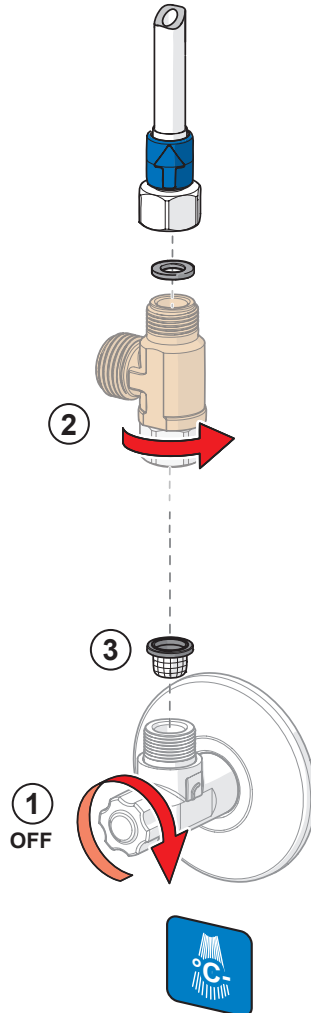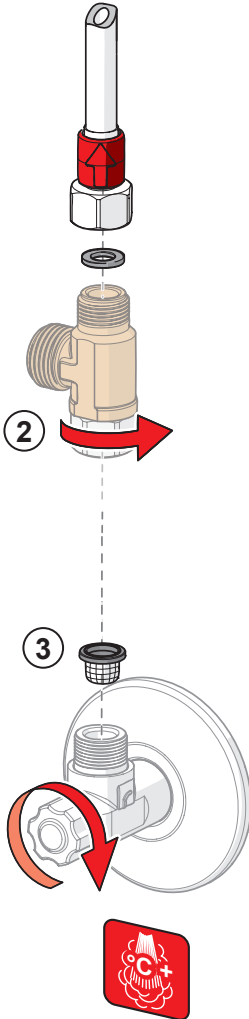




①

1

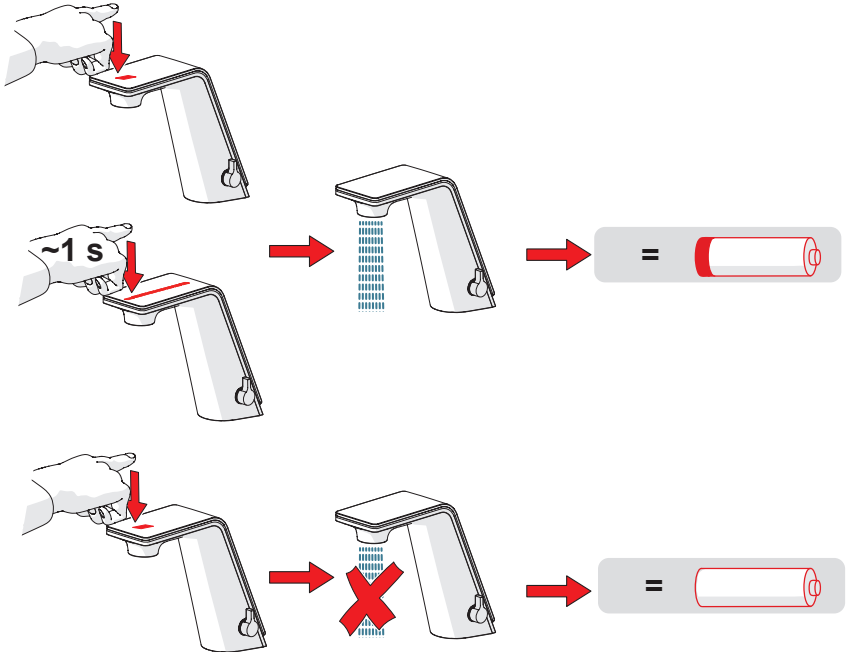


2

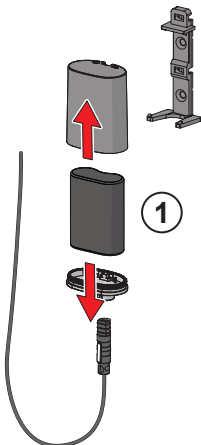






Lithium
CR2450 3 V

HANSA




④

1 0774 2201





2



① ②


③

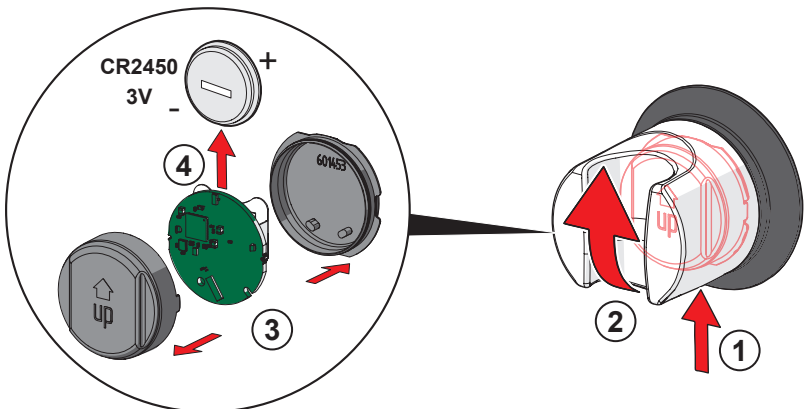





②

① 0774 2201


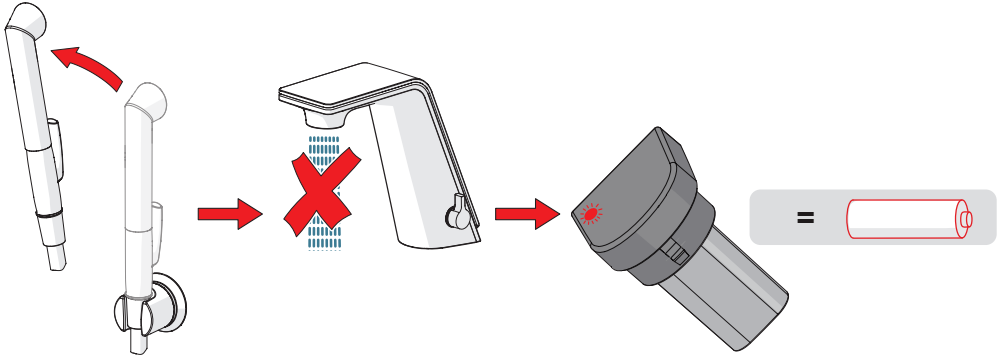


②

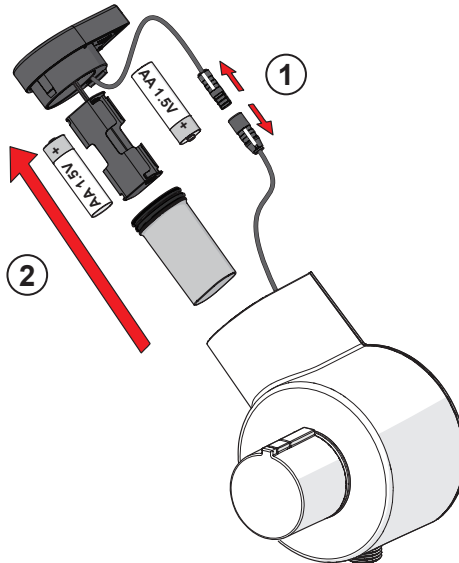



- ① ② ④ ⑤ ⑥ ⑦

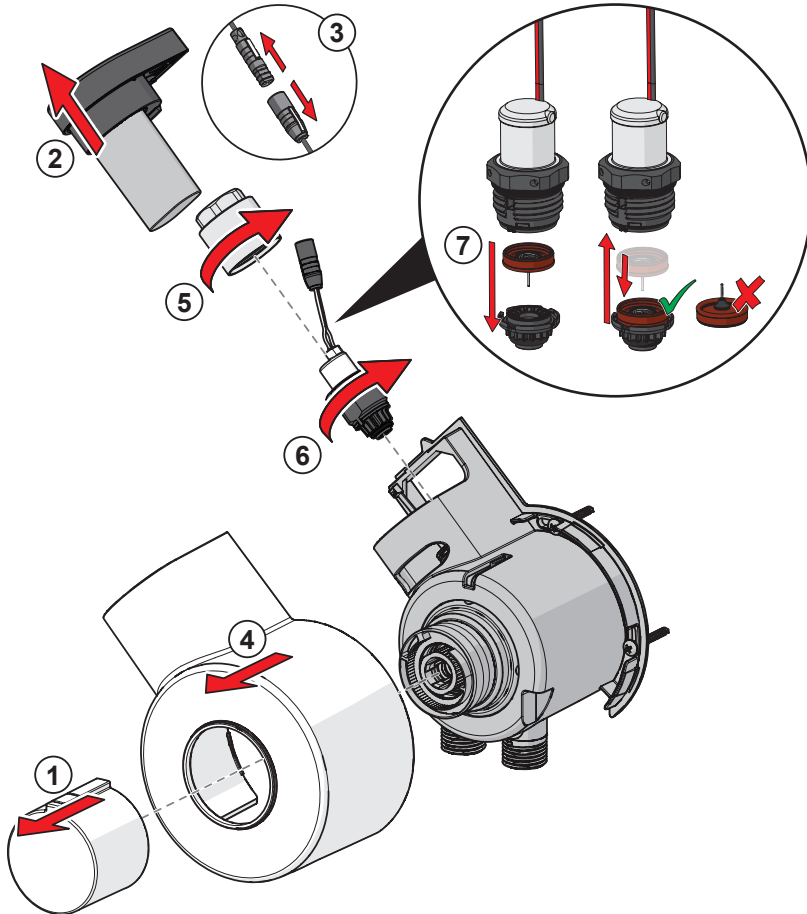





① ③









②



③

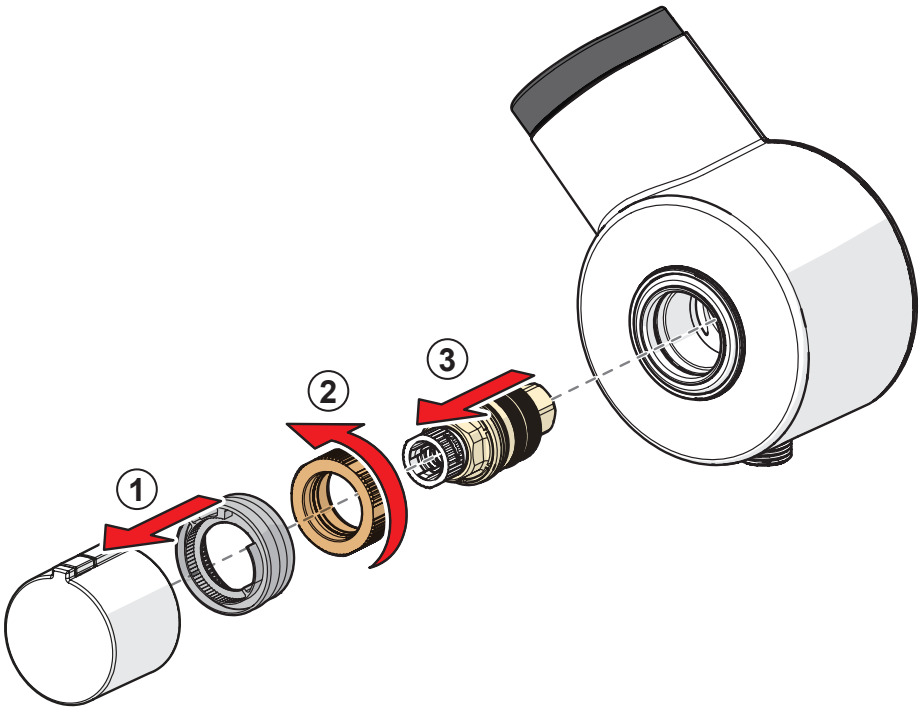

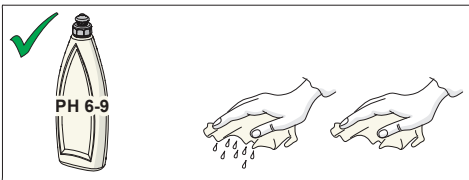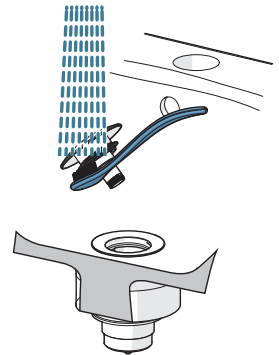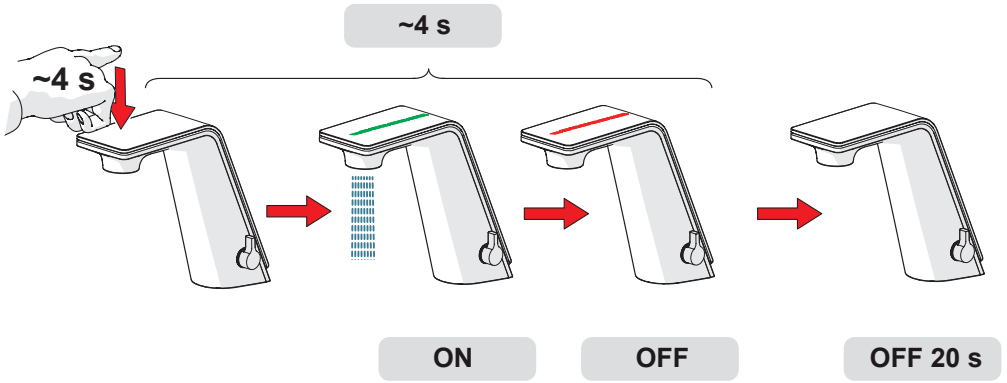

cleaning.hansa.com

Oras Group is a powerful European provider of sanitary fittings: the market leader in the Nordics and a leading company in Continental Europe. The company's mission is to make the use of water easy and sustainable and its vision is to become the European leader of advanced sanitary fittings. Oras Group has two strong brands: Oras and Hansa.

The Group's head office is located in Rauma, Finland, and the Group has three manufacturing sites: Kralovice (Czech Republic), Olesno (Poland) and Rauma (Finland). Oras Group employs approximately 1,200 people in twenty countries. Oras Group is owned by Oras Invest, a family company and an industrial owner.

HANSA Armaturen GmbH
P. O. BOX 81 02 40
D-70519 Stuttgart
Sigmaringer Strasse 107
D-70567 Stuttgart
Tel.: +49 711 16 14 0
Fax: +49 711 16 14 368
info@hansa.de
www.hansa.com

