



报告编号(Report ID): MNIYHN1M88279721

UN38.3 测试报告 UN38.3 Test Report

Sample Description

LiFePO₄ Battery 2x 1S1P

& Model

(3.2V 3.0Ah 9.6Wh)

Applicant

VOLTRONIC Vertriebs- & Service GmbH

Manufacturer

VOLTRONIC Vertriebs- & Service GmbH







No.: MNIYHN1M88279721

Code: s1zk48jp0



Pony Testing International Group

Report ID: MNIYHN1M88279721

Page 1 of 14

I、SAMPLE DESCRIPTION

Sample description		LiFePO ₄ Battery		Sample model	2x 1S1P				
Applicant		VOLTRONIC Vertriebs- & Service GmbH							
	Name		VOLTRONIC Vertriebs- & Service GmbH						
N. C.	Address		Dycker Hahnerhof 2, Jüchen						
Manufacturer	Tel		00492181495260						
	E-mail	yz@	voltronic.de	Web					
Nominal voltage		3.2V	Rated capacity	3.0Ah	Limited charge voltage	3.65V			
Charge current		0.3A	Maximum continuous charge current	1.5A	End charge current	15mA			
Cut-off voltage		2.5V	Maximum discharge current	2.5A	Mass	92g			
Cell number		2PCS	Cell model	18650	Cell capacity	1.5Ah			
Manufacturer of cell		Shandong Goldencell Electronics Technology Co.,Ltd							
Electrochemistry System		LiFePO ₄							
Entrust d	ate	20	19-02-14	Finished date	2019-04-	-10			

II, TEST METHOD

UNITED NATIONS "Recommendations on the TRANSPORT OF DANGEROUS GOODS" Manual of Tests and Criteria (ST/SG/AC.10/11/Rev.6/Amend.1), Part III sub-section.

III、TEST ITEM & CONCLUSION

ITEM	SAMPLE	NUMBER	STANDARD	CONCLUSION
Altitude simulation				PASS
Thermal test	N1~N4 C1~C4		PASS	
Vibration		C1~C4		PASS
Shock			UN38.3	PASS
External short circuit			ST/SG/AC.10/11/Rev.6/ Amend.1	PASS
Impact	N9~N13	C9~C13	Amend,1	PASS
Overcharge	N5~N8 C5~C8		PASS	
Forced discharge	N14~N23	C14~C23		PASS

The Samples has passed the test items of UNITED NATIONS "Recommendations on the TRANSPORT OF DANGEROUS GOODS" Manual of Tests and Criteria (ST/SG/AC.10/11/Rev.6/ Amend.1), Part III sub-section.

Appraiser: IT Wyjang

Checker: Jinshifang

Approver: Vishawbin

Issue Date: April 10, 2019

尼 Pony Testing International Group

@Hotline 400-819-5688

www.ponytest.com

北京实验室: (010)83055000

上海实验室: (021)64851999 长春实验室: (0431)85150908

天津实验室: (022)27360730 郑州实验室: (0371)69350670 苏州实验室: (0512)62997900 新疆实验室: (0991)6684186

青岛实验室: (0532)88706866 大连实验室: (0411)87336618 深圳实验室: (0755)26050909 哈尔滨实验室: (0451)58627755

石家庄实验室: (0311)85376660 武汉实验室: (027)83997127 百安实验室: (029)89608785 呼和浩特实验室: (0471)3450025 广州实验室: (020)89224310 杭州实验室: (0571)87219096

宁波实验室: (0574)87736499

合尼实验室: (0551)63843474 厦门实验室: (0592)5568048

成都实验室: (028)87702708

Pony Testing International Group Shenzhen Co., Ltd. Address: 1/F., Building A2, Jun Feng ZhongCheng ZhiZao Innovation Park, HePing Peace Comunity, Fuliai Road, BaoAn District, Shenzhen, Guangdong, China





Page 2 of 14

Notes:

N1~N8: Cells at first cycle in fully charged states;

N9~N13: Cells at first cycle at 50% of the design rated capacity;


N14~N23: Cells at first cycle in fully discharged states;

C1~C8: Cells after 25 cycles ending in fully charged states;

C9~C13: Cells after 25 cycles at 50% of the design rated capacity;

C14~C23: Cells after 25 cycles ending in fully discharged states.

IV, PHOTO OF THE SAMPLE

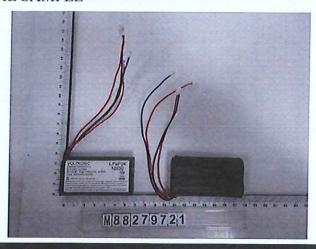

VOLTRONIC Dycker Hahnerhof 2 D-41363 Jüchen 2x 1S1P 3.2V 1500mAh 4.8Wh Total 3000mAh 9.6Wh

LiFeP04 18650

Vorsicht, Caution, Prudence

Beanspruchung durch Stoß, Vibration oder Kurzschluss verhindem / Nicht mit Feuer oder Wasser in Kontakt bringen / Nur für vorgesehenes Messgerat OV-DMC3 verwenden. Avoid mechanical stress caused by impacts, vibration or short circuit/Avoid contact with fire or water/Only use for designated measuring gauge OV-DMC3

Éviter des contraintes mécaniques par chocs, vibration ou court-circuil/Éviter le contact avec de l'eau et le feu/Utiliser uniquement avec l'appareil de mesure OV-DMC3 prévu

Authenticate the photo on original report only

天津实验室: (022)27360730 郑州实验室: (0371)69350670 苏州实验室: (0512)62997900 新疆实验室: (0991)6684186

石家庄实验室: (0311)85376660 西安实验室: (029)89608785 呼和浩特实验室: (0471)3450025 广州实验室: (020)89224310 杭州实验室: (0571)87219096 宁波实验室: (0574)87736499

武汉实验室: (027)83997127 合肥实验室: (0551)63843474 厦门实验室: (0592)5568048 成都实验室: (028)87702708



Page 3 of 14

V, TEST METHOD

Tests T.1 to T.5 shall be conducted in sequence on the same cell or battery. Tests T.6 and T.8 shall be conducted using not otherwise tested cells or batteries. Test T.7 may be conducted using undamaged batteries previously used in tests T.1 to T.5 for purposes of testing on cycled batteries.

In order to quantify the mass loss, the following procedure is provided:

Mass
$$loss(\%) = (M_1-M_2) / M_1 \times 100$$

Where M₁ is the mass before the test and M₂ is the mass after the test. When mass loss does not exceed the values in Table below, it shall be considered as "no mass loss".

Mass M of cell or battery	Mass loss limit
M<1g	0.5%
1g≤M≤75g	0.2%
M>75g	0.1%

T.1 Altitude simulation

Test cells and batteries shall be stored at a pressure of 11.6 kPa or less for at least six hours at ambient temperature (20 \pm 5 °C).

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

T.2 Thermal test

Test cells and batteries are to be stored for at least six hours at a test temperature equal to 72 ± 2 °C, followed by storage for at least six hours at a test temperature equal to -40 ± 2 °C. The maximum time interval between test temperature extremes is 30 minutes. This procedure is to be repeated until 10 total cycles are complete, after which all test cells and batteries are to be stored for 24 hours at ambient temperature (20 ± 5 °C). For large cells and batteries the duration of exposure to the test temperature extremes should be at least 12 hours.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

杭州实验室: (0571)87219096 宁波实验室: (0574)87736499



Page 4 of 14

T.3 Vibration

Cells and batteries are firmly secured to the platform of the vibration machine without distorting the cells in such a manner as to faithfully transmit the vibration. The vibration shall be a sinusoidal waveform with a logarithmic sweep between 7 Hz and 200 Hz and back to 7 Hz traversed in 15 minutes. This cycle shall be repeated 12 times for a total of 3 hours for each of three mutually perpendicular mounting positions of the cell. One of the directions of vibration must be perpendicular to the terminal face.

The logarithmic frequency sweep shall differ for cells and batteries with a gross mass of not more than 12 kg (cells and small batteries), and for batteries with a gross mass of more than 12 kg (large batteries).

For cells and small batteries: from 7 Hz a peak acceleration of 1 g_n is maintained until 18 Hz is reached. The amplitude is then maintained at 0.8 mm (1.6 mm total excursion) and the frequency increased until a peak acceleration of 8 g_n occurs (approximately 50 Hz).

A peak acceleration of 8 g_n is then maintained until the frequency is increased to 200 Hz.

For large batteries: from 7 Hz to a peak acceleration of 1 g_n is maintained until 18 Hz is reached. The amplitude is then maintained at 0.8 mm (1.6 mm total excursion) and the frequency increased until a peak acceleration of 2 g_n occurs (approximately 25 Hz). A peak acceleration of 2 g_n is then maintained until the frequency is increased to 200 Hz.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire during the test and after the test and if the open circuit voltage of each test cell or battery after testing in its perpendicular mounting position is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

T.4 Shock

Test cells and batteries shall be secured to the testing machine by means of a rigid mount which will support all mounting surfaces of each test battery.

Each cell shall be subjected to a half-sine shock of peak acceleration of 150 g_n and pulse duration of 6 milliseconds. Alternatively, large cells may be subjected to a half-sine shock of peak acceleration of 50 gn and pulse duration of 11 milliseconds.

Each battery shall be subjected to a half-sine shock of peak acceleration depending on the mass of the battery. The pulse duration shall be 6 millisecondsfor small batteries and 11 milliseconds for large batteries. The formulas below are provided to calculate the appropriate minimum peak accelerations.

CHotline 400-819-5688

苏州实验室: (0512)62997900 新疆实验室: (0991)6684186

宁波实验室: (0574)87736499

11人一年 イート

Battery	Minimum peak acceleration	Pulse duration
	150 g _n or result of formula	
Small batteries	Acceleration(g _n)= $\sqrt{\left(\frac{100850}{mass*}\right)}$	6 ms
	Whichever is smaller	
	50 g _n or result of formula	
Large batteries	Acceleration(g _n)= $\sqrt{\left(\frac{30000}{mass*}\right)}$	11 ms
	Whichever is smaller	

^{*} Mass is expressed in kilograms.

Each cell or battery shall be subjected to three shocks in the positive direction and to three shocks in the negative direction in each of three mutually perpendicular mounting positions of the cell or battery for a total of 18 shocks.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

T.5 External short circuit

The cell or battery to be tested shall be shall be heated for a period of time necessary to reach a homogeneous stabilized temperature of $57\pm4^{\circ}$ C, measured on the external case. This period of time depends on the size and design of the cell or battery and should be assessed and documented. If this assessment is not feasible, the exposure time shall be at least 6 hours for small cells and small batteries, and 12 hours for large cells and large batteries. Then the cell or battery at $57\pm4\%$ shall be subjected to one short circuit condition with a total external resistance of less than 0.1 ohm. This short circuit condition is continued for at least one hour after the cell or battery external case temperature has returned to 57±4°C, or in the case of the large batteries, has decreased by half of the maximum temperature increase observed during the test and remains below that value. The short circuit and cooling down phases shall be conducted at least at ambient temperature.

Cells and batteries meet this requirement if their external temperature does not exceed 170 °C and there is no disassembly, no rupture and no fire during the test and within six hours after the test.

宁波实验室: (0574)87736499

深圳实验室: (0755)26050909 哈尔滨实验室: (0451)58627755 呼和浩特实验室: (0471)3450025 广州实验室: (020)89224310 天津实验室: (022)27360730 郑州实验室: (0371)69350670 苏州实验室: (0512)62997900 新疆实验室: (0991)6684186

Page 6 of 14

T.6 Impact / Crush

Impact (applicable to cylindrical cells not less than 18 mm in diameter)

The test sample cell or component cell is to be placed on a flat smooth surface. A 15.8 mm \pm 0.1 mm diameter, at least 6 cm long, or the longest dimension of the cell, whichever is greater, Type 316 stainless steel bar is to be placed across the centre of the sample. A 9.1 kg \pm 0.1 kg mass is to be dropped from a height of 61 ± 2.5 cm at the intersection of the bar and sample in a controlled manner using a near frictionless, vertical sliding track or channel with minimal drag on the falling mass. The vertical track or channel used to guide the falling mass shall be oriented 90 degrees from the horizontal supporting surface.

The test sample is to be impacted with its longitudinal axis parallel to the flat surface and perpendicular to the longitudinal axis of the 15.8 mm \pm 0.1 mm diameter curved surface lying across the centre of the test sample. Each sample is to be subjected to only a single impact.

Crush (applicable to prismatic, pouch, coin/button cells and cylindrical cells less than 18 mm in diameter)

A cell or component cell is to be crushed between two flat surfaces. The crushing is to be gradual with a speed of approximately 1.5 cm/s at the first point of contact. The crushing is to be continued until the first of the three options below is reached.

- (a) The applied force reaches 13 kN \pm 0.78 kN;
- (b) The voltage of the cell drops by at least 100 mV; or
- (c) The cell is deformed by 50% or more of its original thickness.

Once the maximum pressure has been obtained, the voltage drops by 100 mV or more, or the cell is deformed by at least 50% of its original thickness, the pressure shall be released.

A prismatic or pouch cell shall be crushed by applying the force to the widest side. A button/coin cell shall be crushed by applying the force on its flat surfaces. For cylindrical cells, the crush force shall be applied perpendicular to the longitudinal axis.

Each test cell or component cell is to be subjected to one crush only. The test sample shall be observed for a further 6 h. The test shall be conducted using test cells or component cells that have not previously been subjected to other tests.

Cells and component cells meet this requirement if their external temperature does not exceed 170 °C and there is no disassembly and no fire during the test and within six hours after this test.

T.7 Overcharge

The charge current shall be twice the manufacturer's recommended maximum continuous charge current. The minimum voltage of the test shall be as follows:



Page 7 of 14

- (a) When the manufacturer's recommended charge voltage is not more than 18V, the minimum voltage of the test shall be the lesser of two times the maximum charge voltage of the battery or 22V.
- (b) When the manufacturer's recommended charge voltage is more than 18V, the minimum voltage of the test shall be 1.2 times the maximum charge voltage.

Tests are to be conducted at ambient temperature; the duration of the test shall be 24 hours.

Rechargeable batteries meet this requirement if there is no disassembly and no fire during the test and within seven days after the test.

T.8 Forced discharge

Each cell shall be forced discharged at ambient temperature by connecting it in series with a 12V D.C. power supply at an initial current equal to the maximum discharge current specified by the manufacturer.

The specified discharge current is to be obtained by connecting a resistive load of the appropriate size and rating in series with the test cell. Each cell shall be forced discharged for a time interval (in hours) equal to its rated capacity divided by the initial test current (in ampere).

Primary or rechargeable cells meet this requirement if there is no disassembly and no fire during the test and within seven days after the test.


Testing International Group Shenzhen Co., Ltd. 285: 1/F., Building A2, Jun Feng ZhongCheng ZhiZao aation Park, HePing Peace Community, FuHai Road, BaoAn cict, Shenzhen, Guangdong, China

宁波实验室: (0574)87736499



Page 8 of 14

VI、TEST PROCEDURE

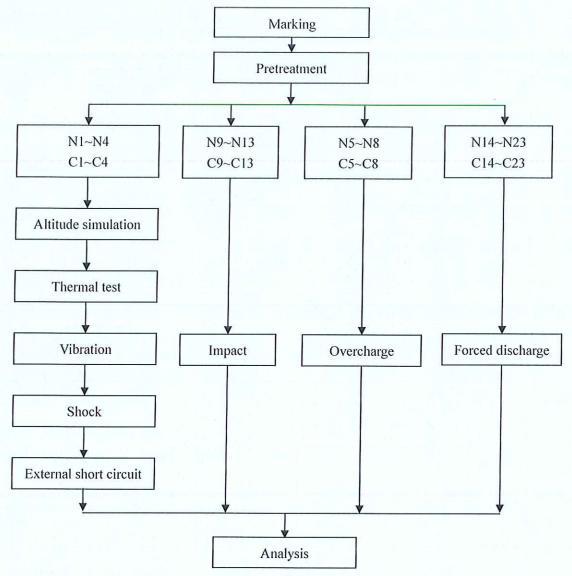

VII, TEST APPARATUS

IE-0121 High precision battery test system

IE-0434 Vacuum drying oven

IE-0090 Multimeter

IE-0824 Tableland air pressure gauge

IE-0259 Electronic balance

IE-0328 Rapid temperature change test chamber

IE-0503 Electric vibration test system

IE-0185 The digital thermometer (TC)

IE-0506 Battery impact testing machine

IE-0511 Programmable DC power source

IE-0281 Temperature controlled short circuit testing machine

IE-0287 Vertical impact crash test platform

苏州实验室: (0512)62997900 新疆实验室: (0991)6684186

成都实验室: (028)87702708

深圳实验室: (0755)26050909 哈尔滨实验室: (0451)58627755 呼和浩特实验室: (0471)3450025 广州实验室: (020)89224310 杭州实验室: (0571)87219096 宁波实验室: (0574)87736499







Page 9 of 14

VIII、DATA

1. Altitude simulation

	Pre	e-test	Aft	er test	Mass	Valtage	Whether leakage,	
No.	Mass	Voltage	Mass	Voltage	Mass loss (%)	Voltage loss (%)	venting, disassembly,	Remark
1	(g)	(V)	(g)	(V)	1035 (70)	1055 (70)	rupture, fire (Y/N)	
NI	92.338	3.385	92.333	3.383	0.005	0.059	N	Long
INI	32.330	3.385	92.555	3.382	0.003	0.089	N	Short
N2	91.817	3.384	91.817	3.383	0.000	0.030	N	Long
IN2	91.017	3.384	91.017	3.383	0.000	0.030	N	Short
NI2	91.923	3.384	91.920	3.382	0.003	0.059	N	Long
N3	91.923	3.386	91.920	3.383	0.003	0.089	N	Short
NIA	92.207	3.393	92.206	3.392	0.001	0.029	N	Long
N4	92.201	3.386	92.200	3.384	0.001	0.059	N	Short
CI	92.621	3.380	92.618	3.380	0.003	0.000	N	Long
C1	92.021	3.373	92.010	3.371	0.003	0.059	N	Short
C2	92.811	3.388	92.810	3.386	0.001	0.059	N	Long
C2	92.011	3.384	92.010	3.382	0.001	0.059	N	Short
C3	92.323	3.393	92.321	3.392	0.002	0.029	N	Long
C3	92.323	3.394	32.321	3.392	0.002	0.059	N	Short
C4	91.857	3.384	91.855	3.383	0.002	0.030	N	Long
C4	31.037	3.380	91.000	3.379	0.002	0.030	N	Short

杭州实验室: (0571)87219096 宁波实验室: (0574)87736499

石家庄实验室: (0311)85376660 武汉实验室: (027)83997127 合肥实验室: (0551)63843474

厦门实验室: (0592)5568048 成都实验室: (028)87702708





Page 10 of 14

2. Thermal test

	Pre	e-test	Afte	er test	Mass	Valtaga	Whether leakage,	
No.	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)	Mass loss (%)	Voltage loss (%)	venting, disassembly, rupture, fire (Y/N)	Remark
		3.383		3.351	0.040	0.946	N	Long
N1	92.333	3.382	92.294	3.349	0.042	0.976	N	Short
210	01.017	3.383	01 702	3.351	0.037	0.946	N	Long
N2	91.817	3.383	91.783	3.351	0.037	0.946	N	Short
112	91.920	3.382	91.890	3.352	0.033	0.887	N	Long
N3	91.920	3.383	91.090	3.352	0.033	0.916	N	Short
NIA	92.206	3.392	92.173	3.357	0.036	1.032	N	Long
N4	92.200	3.384	92.173	3.350	0.036	1.005	N	Short
01	92.618	3.380	92.582	3.348	0.039	0.947	N	Long
C1	92.010	3.371	92.562	3.344	0.039	0.801	N	Short
00	92.810	3.386	92.773	3.352	0.040	1.004	N	Long
C2	92.010	3.382	92.113	3.350	0.040	0.946	N	Short
02	92.321	3.392	92.290	3.357	0.034	1.032	N	Long
C3	82.321	3.392	92.290	3.352	0.034	1.179	N	Short
CI	91.855	3.383	91.823	3.351	0.035	0.946	N	Long
C4	91.000	3.379	81.023	3.347	0.035	0.947	N	Short

苏州实验室: (0512)62997900 新疆实验室: (0991)6684186

宁波实验室: (0574)87736499



Page 11 of 14

3. Vibration

	Pre	e-test	Aft	er test	Mana	V-14	Whether leakage,	
No.	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)	Mass loss (%)	Voltage loss (%)	venting, disassembly, rupture, fire (Y/N)	Remark
311	92.294	3.351	92.294	3.349	0.000	0.060	N	Long
NI	92.294	3.349	92.294	3.349	0.000	0.000	N	Short
210	01 702	3.351	01 700	3.351	0.003	0.000	N	Long
N2	91.783	3.351	91.780	3.351	0.003	0.000	N	Short
) IO	91.890	3.352	01 900	3.352	0.000	0.000	N	Long
N3	91.090	3.352	91.890	3.352	0.000	0.000	N	Short
214	02.472	3.357	02 472	3.355	0.000	0.060	N	Long
N4	92.173	3.350	92.173	3.350	0.000	0.000	N	Short
	02.502	3.348	02.592	3.345	0.000	0.090	N	Long
C1	92.582	3.344	92.582	3.343	0.000	0.030	N	Short
GO.	00.770	3.352	00.772	3.350	0.000	0.060	N	Long
C2	92.773	3.350	92.773	3.350	0.000	0.000	N	Short
	00.000	3.357	00.000	3.355	0.000	0.060	N	Long
C3	92.290	3.352	92.290	3.352	0.000	0.000	N	Short
0.1	04.000	3.351	04 000	3.347	0.000	0.119	N	Long
C4	91.823	3.347	91.823	3.347	0.000	0.000	N	Short

Pony Testing International Group Shenzhen Co., Ltd. Mdfress: 1/F., Building Az, Jun Feng ZhongCheng ZhiZao Innovation Park, HeFing Peace Community, FuHai Road, BaoAn District, Shenzhen, Guangdong, China

宁波实验室: (0574)87736499





Page 12 of 14

4. Shock

	Pre	e-test	Aft	er test	Mass	Voltage	Whether leakage,	
No.	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)	loss (%)	loss (%)	venting, disassembly, rupture, fire (Y/N)	Remark
		3.349	00.004	3.349	0.000	0.000	N	Long
N1	92.294	3.349	92.294	3.349	0.000	0.000	N	Short
	04.700	3.351	04 700	3.351	0.000	0.000	N	Long
N2	91.780	3.351	91.780	3.350	0.000	0.030	N	Short
	04.000	3.352	04.000	3.352	0.000	0.000	N	Long
N3	91.890	3.352	91.888	3.352	0.002	0.000	N	Short
	00.470	3.355	00.470	3.352	0.000	0.089	N	Long
N4	92.173	3.350	92.173	3.350	0.000	0.000	N	Short
	00.500	3.345	00.500	3.344	0.000	0.030	N	Long
C1	92.582	3.343	92.582	3.343	0.000	0.000	N	Short
	00 770	3.350	00 770	3.350	0.000	0.000	N	Long
C2	92.773	3.350	92.773	3.350	0.000	0.000	N	Short
	00.000	3.355	00.000	3.353	0.000	0.060	N	Long
C3	92.290	3.352	92.290	3.352	0.000	0.000	N	Short
Valence	04.000	3.347	04.000	3.347	0.000	0.000	N	Long
C4	91.823	3.347	91.823	3.347	0.000	0.000	N	Short

宁波实验室: (0574)87736499



Page 13 of 14

5. External short circuit

No.	Peak temperature (°C)	Whether disassembly, rupture, fire (Y/N)	Remark
N1	57.6	N	
N2	57.7	N	
N3	57.5	N	Two ports test in
N4	57.6	N	sequence, record
C1	57.4	N	maximum
C2	57.6	N	temperature
C3	57.4	N	
C4	57.6	N	

6. Impact

No.	Peak temperature (°C)	Whether disassembly, fire (Y/N)
N9	99.4	N
N10	95.3	N
N11	100.7	N
N12	96.9	N
N13	95.7	N
C9	98.6	N
C10	97.7	N
C11	96.9	N
C12	98.6	N
C13	99.7	N

Pony Testing International Group Shenzhen Co., Ltd. Address: I/F., Building A2, Jun Feng ZhongCheng ZhiZao Innovation Park, HePing Peace Community, Fulfai Road, BaoAn District, Shenzhen, Guangdong, China

宁波实验室: (0574)87736499

Page 14 of 14

7. Overcharge

No.	Whether disassembly, fire (Y/N)
N5	N
N6	N
N7	N
N8	N .
C5	N .
C6	N
C7	N
C8	N

8. Forced discharge

No.	Whether disassembly, fire (Y/N)
N14	N
N15	N
N16	N
N17	N
N18	N
N19	N
N20	N
N21	N
N22	N
N23	N
C14	N
C15	N
C16	N
C17	N
C18	N
C19	N
C20	N
C21	N
C22	N
C23	N

*** End of report ***

